


# PRECISION INSTRUMENT COMPANY

## BIMETAL THERMOMETER

### TYPE 'BxSx' STRAIGHT FORM

#### STANDARD FEATURES


- All Stainless Construction
- With Glass Lens
- Anti-Parallax Dial
- Vibration Resistant (No Needle Flutter)
- Fast Response To Temperature Change
- Crimped Or Removeable Bezel Available
- +/- 1 % Full Scale Accuracy

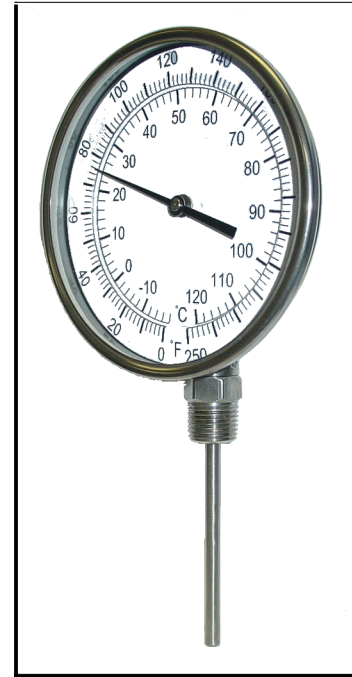

STEM LENGTH*	PART NUMBER	
	3" DIAL	5" DIAL
2 1/2"	B3S2	B5S2
4"	B3S4	B5S4
6"	B3S6	B5S6
9"	B3S9	B5S9
12"	B3S12	B5S12
15"	B3S15	B5S15
18"	B3S18	B5S18
24"	B3S24	B5S24

STANDARD RANGES*	
CODE	RANGE
AA	-40/120 F & C
BB	-40/160 F & C
EE	0/150 F & C
GG	0/200 F & C
JJ	20/240 F & C
II	0/250 F & C
MM	50/300 F & C
PP	50/400 F & C
RR	50/550 F & C
SS	150/750 F & C
TT	200/1000 F & C

**\*NOTE: OTHER RANGES, STEM LENGTHS AND CONFIGURATIONS ARE AVAILABLE UPON REQUEST. PLEASE CALL WITH ANY INQUIRIES.**

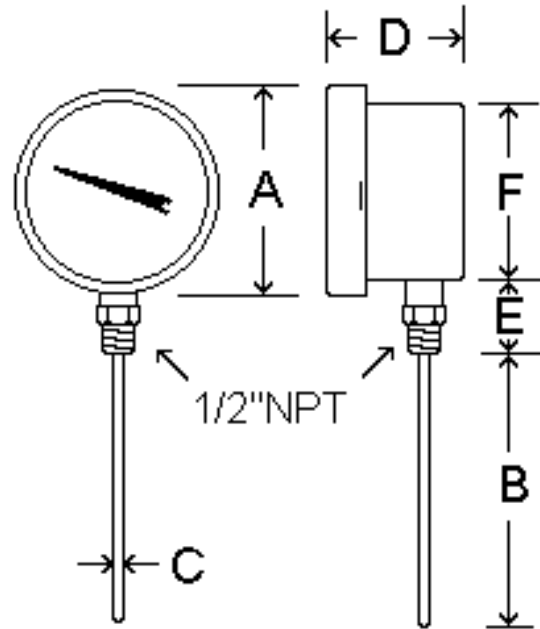

	INCHES	MM
A	3.32"	84.32
B	STEM LENGTH	LENGTH
C	.25"	6.45
D	1.76"	44.91
E	1.36"	34.63
F	2.96"	75.3