

SPACE

ANGLE VALVE

300-600-900-1500 LB

CR13/HF TRIM

APPLICABLE STANDARDS

Steel Gate Valves API 600
 Steel Valves, ANSI B16.34-1977, Standard Class
 Face-to-face, End-to-end, ANSI B16.10
 End Flanges, ANSI B16.5
 Weld Ends, ANSI B16.25

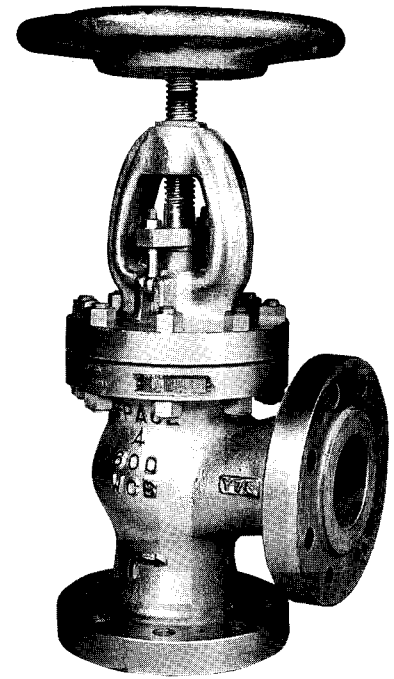


FIGURE 30041C – 300 lb
 60041C – 600 lb
 90041C – 900 lb
 150041C – 1500 lb

300 LB

DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	5¼	5¾	6¼	6¾	7	7½	8¾	11	12¼	14	16½	17
H Height (Open)	17	19½	20½	23	25½	27	31	32½	35	44½	53	62
W Handwheel Diam.	8	10	10	12	14	14	20	20	24	27	30	30
Weight RF (lbs)	82	110	136	222	220	284	390	741	1015	1682	2240	3100

600 LB

DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	5¾	6½	7	7½	8½	10	11	13	15½	16½	17½	19½
H Height (Open)	20	22	25½	28	29½	35	41	55	57	59	61½	64
W Handwheel Diam.	10	10	12	14	16	20	24	24	30	30	36	36
Weight RF (lbs)	92	144	176	250	315	492	705	1310	1900	2450	3100	3900

900 LB

DIMENSIONS IN INCHES:

SIZE	3"	3½"	4"	5"	6"	8"	10"
L Face to Face RF-BW	7½	8½	9	11	12	14½	16½
H Height (Open)	30	30½	31	35	48	55	64
W Handwheel Diam.	16	18	20	20	24	30	30
Weight RF (lbs)	255	380	480	785	1150	1820	3100

1500 LB

DIMENSIONS IN INCHES:

2"	2½"	3"	4"	5"	6"	8"
7¼	8¼	9¼	10¼	13¼	13¾	19½
27½	28½	30	38	45	53½	64
14	16	20	24	28	30	36
210	315	410	670	1010	1240	2100