

# SPACE

## GLOBE VALVE

300-600-900-1500 LB

CR13/HF TRIM

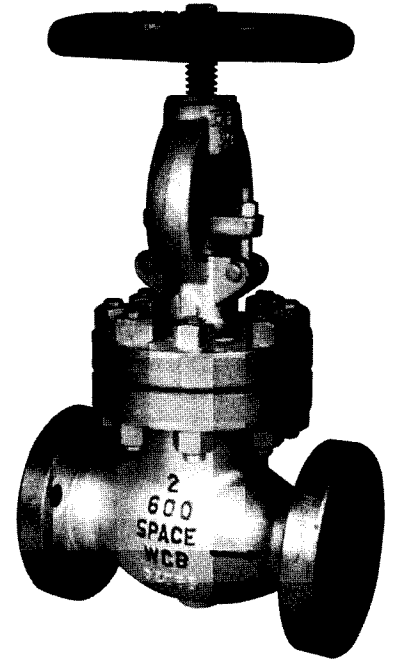


FIGURE 30031C – 300 lb  
 60031C – 600 lb  
 90031C – 900 lb  
 150031C – 1500 lb

### APPLICABLE STANDARDS

Steel Gate Valves API-600  
 Steel Valves, ANSI B16.34-1977, Standard Class  
 Face-to-face, End-to-end, ANSI B16.10  
 End Flanges, ANSI B16.5  
 Weld Ends, ANSI B16.25

### 300 LB

#### DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	10½	11½	12½	13¼	14	15¼	17½	22	24½	28	33	34
H Height (Open)	17	19½	20½	23	25½	27	31	32½	35	44½	53	62
W Handwheel Diam.	8	10	10	12	14	14	20	20	24	27	30	30
Weight RF (lbs)	82	110	136	222	220	284	390	741	1015	1682	2240	3100

### 600 LB

#### DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	11½	13	14	15	17	20	22	26	31	33	35	39
H Height (Open)	20	22	25½	28	29½	35	41	55	57	59	61½	64
W Handwheel Diam.	10	10	12	14	16	20	24	24	30	30	36	36
Weight RF (lbs)	92	144	176	250	315	492	705	1310	1900	2450	3100	3900

### 900 LB

#### DIMENSIONS IN INCHES:

SIZE	3"	3½"	4"	5"	6"	8"	10"
L Face to Face RF-BW	15	17	18	22	24	29	33
H Height (Open)	30	30½	31	35	48	55	64
W Handwheel Diam.	16	18	20	20	24	30	30
Weight RF (lbs)	255	380	480	785	1150	1820	3100

### 1500 LB

#### DIMENSIONS IN INCHES:

2"	2½"	3"	4"	5"	6"	8"
14½	16½	18½	21½	26½	27¼	32¼
27½	28½	30	38	45	53½	64
14	16	20	24	28	30	36
210	315	410	670	1010	1240	2100