

SPACE

SWING CHECK VALVE

150 LB

CR13/HF TRIM

APPLICABLE STANDARDS

Steel Valves, ANSI B16.34-1977, Standard Class
 Face-to-face, End-to-end, ANSI B16.10
 End Flanges, ANSI B16.5
 Weld Ends, ANSI B16.25


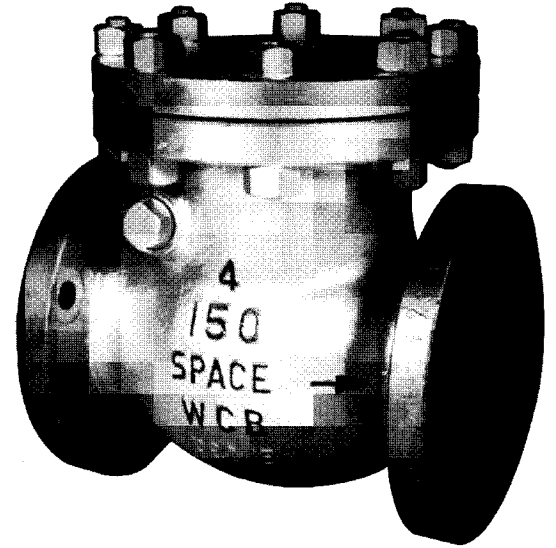


FIGURE 15051C

PART	MATERIALS	ASTM SPEC.
Body	Carbon steel	A216 Gr. WCB
Cap	Carbon steel	A216 Gr. WCB
Disc	CR13	A276 TY 410
Disc nut	CR13	A276 TY 410
Seat ring	CR13	A276 TY 410
Hinge	Carbon steel	A216 Gr. WCB
Hinge pin	CR13	A276 TY 410
Side plug	Stainless	A276 TY 410
Cap stud bolt	Carbon steel	A193-B7
Cap stud bolt nut	Carbon steel	A194-2H
Gasket	Non Asbestos	Commercial

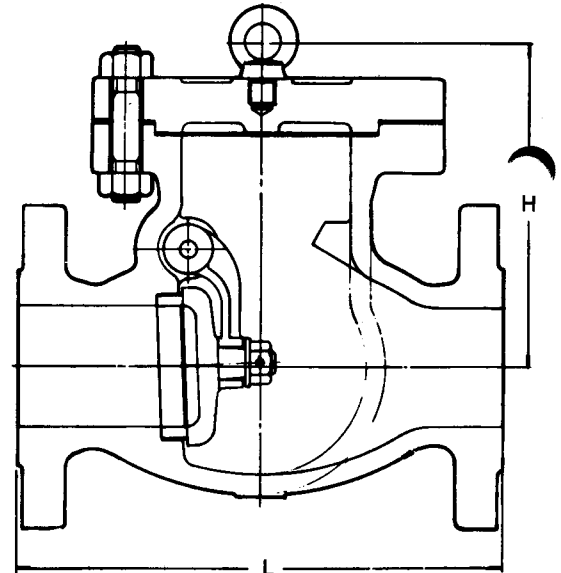

DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L Face to Face RF-BW	8	8½	9½	10½	11½	13	14	19½	24½	27½	31	34	38½	38½	51
H Height	6¼	6½	7½	8½	9	9½	10½	13	14	15	17½	19	21½	24	27
Weight RF (lbs)	38	55	73	92	104	141	190	331	507	950	970	1246	1663	1821	2997