


# SPACE

## SWING CHECK VALVE

300-600-900-1500 LB

CR13/HF TRIM

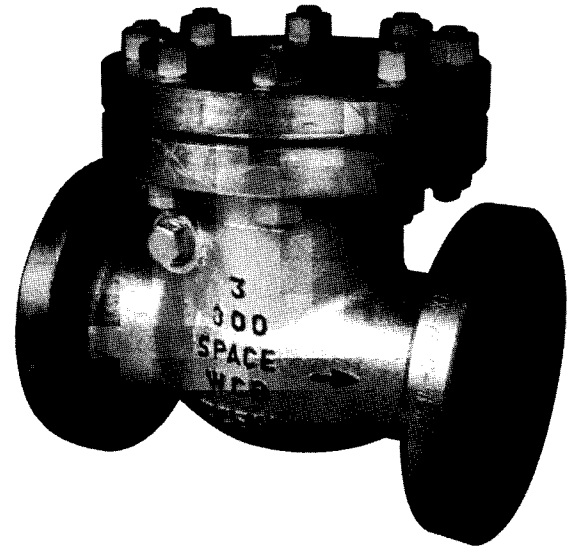

### APPLICABLE STANDARDS

Steel Gate Valves API 600  
 Steel Valves, ANSI B16.34-1977, Standard Class  
 Face-to-face, End-to-end, ANSI B16.10  
 End Flanges, ANSI B16.5  
 Weld Ends, ANSI B16.25

FIGURE 30051C – 300 lb  
 60051C – 600 lb  
 90051C – 900 lb  
 150051C – 1500 lb

### 300 LB

#### DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	10½	11½	12½	13½	14	15½	17½	21	24½	28	33	34
H Height	6½	7½	8½	9	9½	10	12	14½	15½	18	19	21
Weight RF (lbs)	35	55	70	90	115	140	200	390	470	635	900	1250

### 600 LB

#### DIMENSIONS IN INCHES:

SIZE	2"	2½"	3"	3½"	4"	5"	6"	8"	10"	12"	14"	16"
L Face to Face RF-BW	11½	13	14	15	17	20	22	26	31	33	35	39
H Height	8	9	9½	10	11½	12	13	15	18	23	25	28
Weight RF (lbs)	80	105	144	200	240	365	465	860	1300	1740	2200	2550

### 900 LB

#### DIMENSIONS IN INCHES:

SIZE	3"	3½"	4"	5"	6"	8"	10"
L Face to Face RF-BW	15	17	18	22	24	29	33
H Height	12	12½	13	14	14½	17	22
Weight RF (lbs)	195	290	350	500	660	1220	1900

### 1500 LB

#### DIMENSIONS IN INCHES:

2"	2½"	3"	4"	5"	6"	8"
14½	16½	18½	21½	26½	27½	32½
10	12	13½	15	18	21	23
185	270	310	575	950	1290	2150